



V 1.1 - 042025

## PeopleLink Dante Speaker



### Key Features

- 30W power with 65Hz to 20kHz frequency response.
- 6-inch waterproof woofer and 1-inch adjustable silk dome tweeter.
- Peak sound output of 111dB with 8-ohm impedance.
- Fireproof engineering plastic and metal cabinet.
- Flexible suspension or flush mount installation with a 246mm round hole.

This 30W speaker features a 6-inch waterproof woofer and a 1-inch adjustable silk dome tweeter, providing a frequency range of 65Hz to 20kHz and a peak output of 111dB. With an 8-ohm impedance, it's housed in a fireproof engineering plastic and metal cabinet. It supports suspension or flush mounting with a 246mm round hole, includes a metal safety rope, and measures 279mm x 279mm x 176mm, weighing 3kg.

## General Specifications

**Power :** 30W

**Frequency Response (-10dB) :** 65Hz - 20kHz

**Output Boost (Peak) :** 111dB

**Impedance :** 8 Ohms

**Woofer :** 6-Inch Composite Diaphragm Waterproof Unit

**Tweeter :** 1-Inch Silk Dome Tweeter, Angle Adjustable

**Amplifier Cabinet Material :** Engineering Plastic Metal Fireproof Cavity

**Installation :** Suspension and Flushing Mount

**Opening Installation Dimensions :** 246mm (Round Hole)

**Accessories :** Metal Safety Rope

**Dimensions :** 279mm x 279mm x 176mm

**Weight :** 3kg

## General Specifications

**Coverage Angle:** -115° (105dB @ 3kHz), 115degrees (-89 dB @ 4kHz)

**Sensitivity:** >89dB (at 1m)

**Min/Max Ceiling Thickness:** 0.9mm (0.35") to 40.9mm (1.6")

**Transducer (s) Low Frequency:** 164mm (6.5") polypropylene cone, rubber surround;



**High Frequency:** 25.4mm (1") silk dome tweeter

**Operating Temperature:** -10 - 40° C

**Relative Air humidity:** 0 - 95%

**Safety Certification:** CE, FCC, RoHS

## Application Scenarios

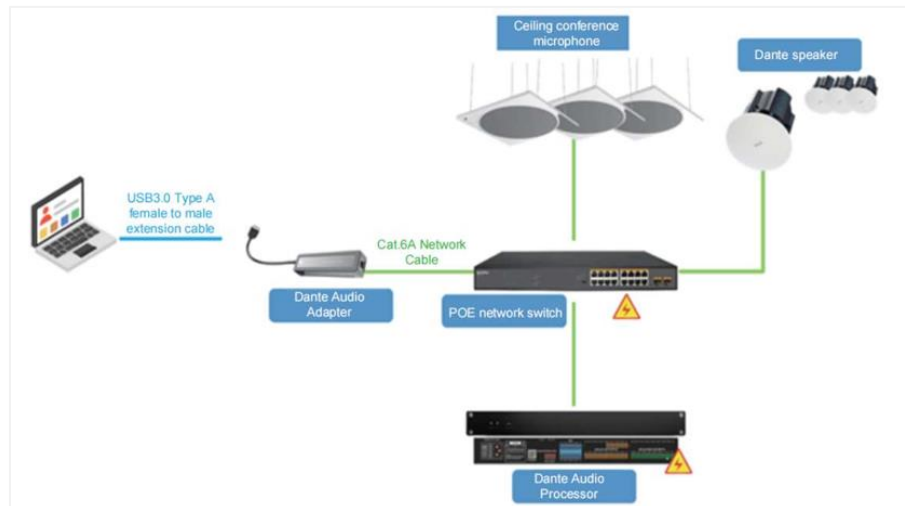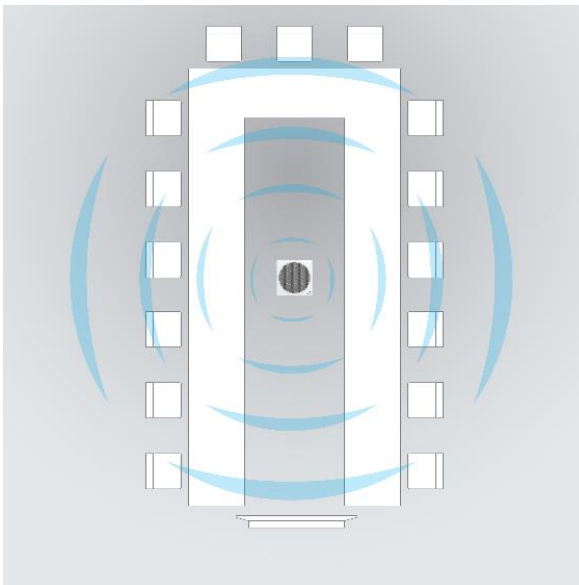

**Disclaimer:-** Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

## Ordering Information

PeopleLink Dante Speaker : **PPL-TSP-DNT-01**

### SALES AND INQUIRIES

#### Global Headquarters

Q3-A3, 10th Floor Cyber Towers,  
HITEC City, Hyderabad,  
Telangana 500081, **India**  
**Phone:** +91 9100123013  
**Email:** [vc@peoplelinkvc.com](mailto:vc@peoplelinkvc.com)

#### International Contact Numbers

**USA:** +1 669-696-8383  
**Australia:** +61 370 037070  
**France:** +33 6 80 75 26 42  
**Middle East:** +966 5300 19292  
**UK:** +44 20 4571 5454

**UAE:** +971 4 3339082  
**Canada:** +1 647-945-7373  
**Malaysia:** +(6)018-2872188  
**New Zealand:** +64-9-802-4666  
**Africa:** +254 107 529 656

#### Tech Support

**Toll Free:** 1800 208 3399  
[customersupport@peoplelinkvc.com](mailto:customersupport@peoplelinkvc.com)