


V 1.0 - 072025



PeopleLink AI Live Board-Lite X75"

Key Features

- Zero bonding technology, low parallax writing and wider viewing angles.
- 4mm anti-glare tempered glass.
- 4K Ultra HD display, support for all-channel 4K UI display.
- Support wireless screen mirroring.
- High precision IR touch makes the user write more smoothly.
- Support dual pens with different color displays, which makes teamwork easier.
- High-level welcome application, enriching the live interactive experience with great fun.
- Split whiteboard, parallel tasks and wider scenes.
- New hover ball mode for quick customization of features.
- Eye protection, lock screen, touch lock and other tools.
- Support multi-user functionality.
- Support palm-rejection technology.

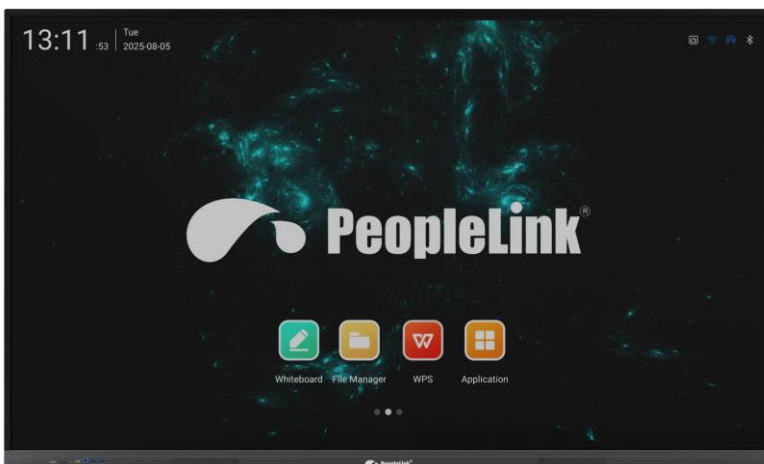

Redefine Smarter Collaboration with PeopleLink AI Live Board-Lite X75"

Let the versatile 4K UHD interactive display bring more collaboration and student engagement to your classroom. With a button, you can turn the display into a digital whiteboard, share files in one touch, and use your favorite software. PeopleLink X75" Interactive display works in your world and lets you interact your way.

- **Superior touch experience**

With PeopleLink X75" Interactive display advance technology, users can annotate with a writing stylus or fingers which is as natural as writing on papers.

- **Interaction made easy**

PeopleLink X75" Interactive display brings efficiency to your classes and teams so you can interact with ease, anytime. With a lightweight slim frame design, Windows system and built-in OS support, embedded tools and a personalized user interface, it's the perfect solution to seamless collaboration in school and in the office.

- **Interact with the whole group**

PeopleLink X75" Interactive display series supports up to 40 points of touch, allowing multiple users to interact at the same time. With smooth and responsive touch, anyone can take notes, write and draw on the screen, making the classroom a truly collaborative space.

- **Customize the Interface to meet your needs**

Whether you need a display for your classroom or conference room, the PeopleLink X75" Interactive display lets you easily change the screen theme and personalize the user interface on your built-in operating system. Keep the home screen simple while giving your team quick access to any tools they might need.

General Specifications

Display Parameters

Size : 75"

Response time : 8ms

Aspect ratio: 16:9

Display area : 1651 (H) × 929 (V) mm

Resolution : 3840(H) × 2160(V)

Pixel pitch : 0.42975 × 0.42975mm

Refreshing frequency : 60Hz

Display color : 1.07B (10bit)

NTSC : 72%

Contrast ratio (Typ) : 4000:1(Static typ.)

Viewing angle : 178° (H/V)

Back light unit : DLED

Brightness : Up to 350cd/m²

Haze : 25%

Life span : ≥50000hrs

Audio

Soundtrack : 2.0

Power : 2 x 20W

Camera (Optional)

Pixel : 48MP

Quantity : 1

Location : Upper frame

Viewing angle : D=119° H=97° V=74°

Function : Support voice tracking, face tracking, AI gesture control

Microphone (Optional)

Distance of a pickup : 0~8m

Quantity : 8

Pickup angle : 0° ~180°

Function : Support echo cancellation, background noise suppression, gain compensation

General Specifications

Touch Specification

Sensing type : IR Touch

Touch points : 40 points touch

Mi. Object size : 2mm

Touch tool : Finger; passive IR pen

Response time : ≤5ms

Accuracy : ±1mm

Writing height : ≤3mm

Writing display : Single Stylus pen with two colors

Interpolation resolution : 32767 (W) × 32767(D)

Operating System

System version : Android14.0

Frequency : 1.5GHZ

CPU : 8-core A55

GPU : Quad-core MaliG52

RAM : 8GB

ROM : 128GB

OSD : English, Hindi, Spanish, Korean, Japanese, Russian, Vietnamese, French, German, Italian, Dutch, Arabic, Indonesian, Kazakh, Polish, Portuguese, Thai, Ukrainian, Greek, Turkish, Simplified Chinese, Traditional Chinese, 22 languages in total

Bluetooth

version : 5.0

Operation frequency : 2.4GHz

Operation distance : 0~10m

Remark : Built-in Bluetooth

Wi-Fi

Version : 802.11ac/b/g/n/a

Operation frequency : 2.4GHz/5GHz

Operation distance : 0~10m

Remark : Built - in Wi-Fi

Front Interface

USB3.0 : 2

HDMI IN : 1

TOUCH : 1

TYPE-C : 1 (only USB function, optional full function)

Keys : 1

On board Interface

TF Card : 1

USB-A2.0 : 1

USB-A2.0 : 1

HDMI IN : 2 (1 ARC)

HDMI OUT : 1 (optional)

TOUCH : 1

RS232 : 1

Line out : 1

COAX : 1

LAN IN : 1

3.5mm Jack : 1

Power

Power requirements : 100-240V~50/60Hz 4A

Max power : 400W

Standby power : ≤0.5W

Physical Specifications

Dimension (L×W×T) : 1706.8 × 1027.3 × 116mm

Dimension (package) L×T×H : 1860 × 220 × 1160mm

Thickness of machine (including bracket) : 152mm
(75/86)

VESA : 600 × 400mm

Wall-hanging screw spec : M8 × 20mm

Net weight : 50KG

Gross weight : 64KG

General Specifications

Accessories

Power cord : x1

Stylus pen : x2

Wall mount : x1

Quick start : x1

Remote : x1

Environmental conditions

Operation temperature : 0°C~40°C

Operation humidity : 10%~90%RH

Storage temperature : -20°C~60°C

Storage humidity : 10%~90%RH

Altitude : < 5000m

Optional Module


OPS module dimension (L × W × H)

OPS (120mm x 180mm x 30mm)


OPS (195mm x 180mm x 30mm)

OPS (195mm x 180mm x 42mm)

Product Diagram

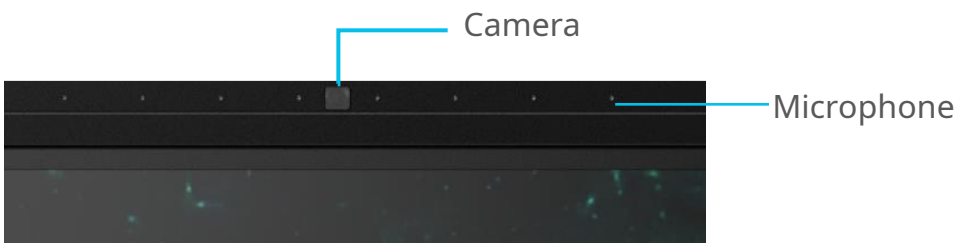


With Camera

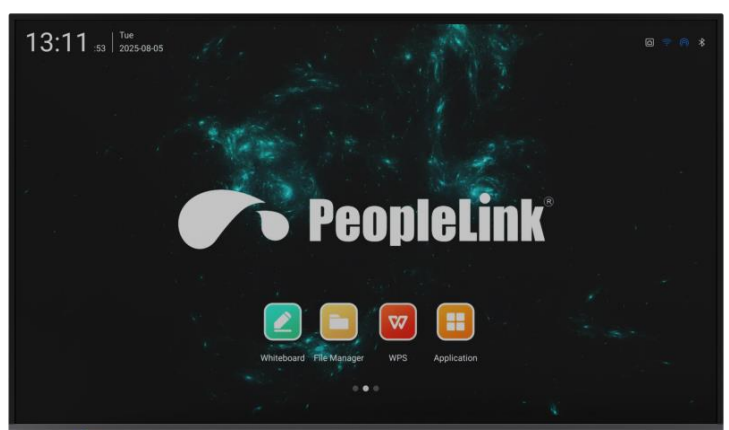

Without Camera

Product Diagram

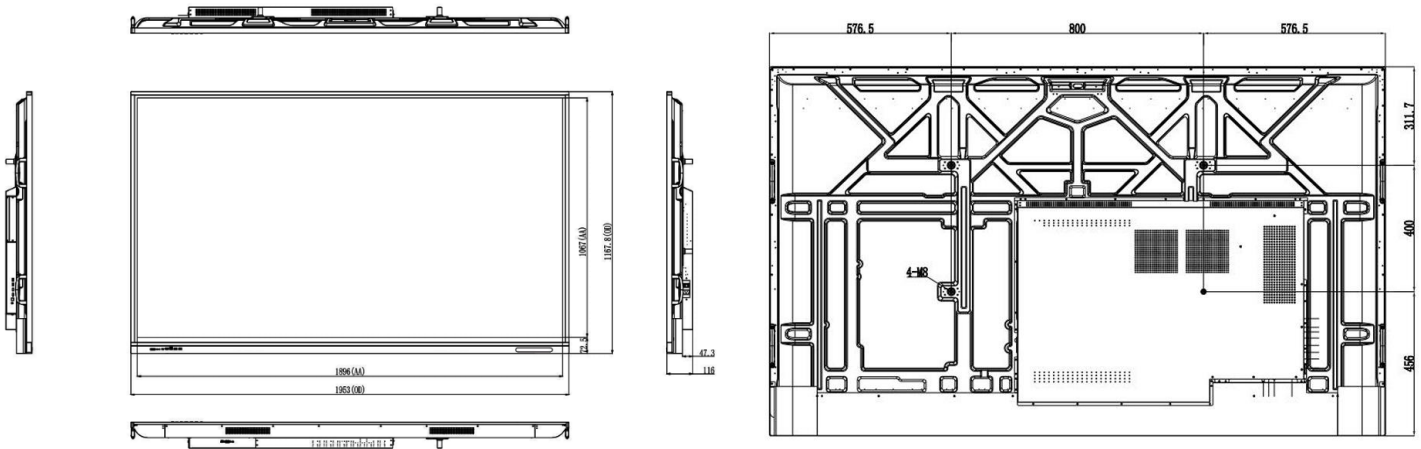

Ordering Information

PeopleLink Allive Board-Lite X75	: PDS-ICB-RX36
PeopleLink Allive Board-lite X75C	: PDS-ICB-RX37
PeopleLink Allive Board-Lite X75H	: PDS-ICB-RX38
PeopleLink Allive Board-Lite X75HC	: PDS-ICB-RX40

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad, Telangana
500081, **India**
Phone: **+91 9100123013**
Email: **vc@peoplelinkvc.com**

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 4 3339082
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 107 529 656

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com